

DocuCentre-V 3065 / 3060 / 2060



DocuCentre-V 3065 / 3060 / 2060

Easy to Operate, Easy to Collaborate

FUJI XEROX 



A compact multifunction device streamlining work, space, and cost.

The functionality of the DocuCentre V 3065 / 3060 / 2060 series can be enhanced to suit your work style, offering new levels of performance, operability and flexibility. Daily tasks become more efficient and intensive workflows are simplified with this dependable monochrome multifunction device.

Copy
 3065 | 3060 | 2060
35 | 30 | 25
 ppm*1

Print
 3065 | 3060 | 2060
35 | 30 | 25
 ppm*1

Fax
**Super G3
 Supported**

Scan
 B / W, Colour
55
 ppm*2

*1: A4 LEF

*2: Fuji Xerox Standard Paper (A4 LEF) 200dpi, to Folder.



* DocuCentre-V 3060 with side tray and optional Fax Kit.

A variety of options with a variety of combinations.
Adapting to any installation space.



Finishing Options



① Finisher-A1
Staple



② Finisher-B1
Staple 2-hole punch



③ Booklet Maker Unit for
Finisher B1
Staple 2-hole punch+saddle staple



④ 1 Tray Module with Cabinet



⑤ 3 Tray module

Output tray designation and envelope printing via output tray



When Inner Output Tray or Side Tray is attached, you can designate the machine's output trays to be used for specific functions, i.e. copy, print, or fax.



Easy envelope printing via the bypass tray.

Easy and efficient operation



Easy Fingertip Control.

The new DocuCentre-V series takes advantage of technology seen in smartphones and tablets by enabling users to operate the devices intuitively, for faster and more efficient production. Four different gestures – tap, double-tap, drag and flick – can be used to scroll and switch functions smoothly and quickly.

High quality

Reproduction in high-quality 1200 x 1200 dpi resolution.

Faster scan

Equipped with high speed colour scanner, large volume paper documents can be converted into electronic form easily with the use of the Duplex Automatic Document Feeder.



Scanned data can be converted to DocuWorks document or PDF when sending as an e-mail or storing to PC. Functions also available such as OCR* – useful for search, compression to reduce communication load, and password to provide security. Scanned data can be saved directly to USB memory.

* Optional.


Easy-to-use scan applications

Scan Auto

Scanning is now much simpler with the automatic recognition of both the orientation and number of printed sides of the original document.


The scan data destination is also set automatically during the authentication process.

Or, if you prefer, you can select the destination quickly from your send history.



Easy operation from “Simple” windows


“Simple Copy” and “Simple Fax” windows are available for easy operation, showing only the basic settings with easier to read 5 mm font.

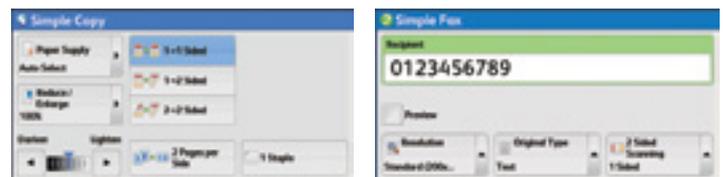

Waste-free fax

[Receiving]

Thumbnails of received faxes stored in a folder can be viewed to print only the necessary documents. This reduces unnecessary print outs. Once a fax is stored in a folder, you can send it via email or transfer it to a shared folder, in addition to printing. You can even view the fax on your mobile device while on the go.

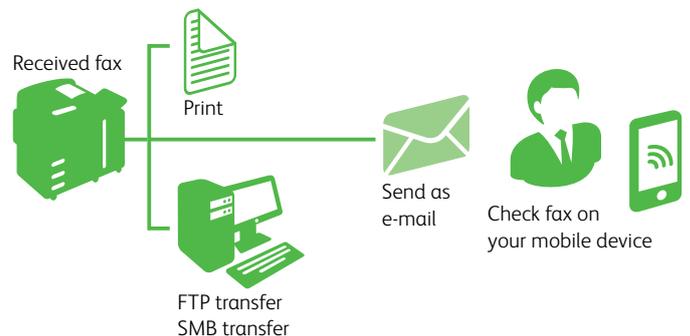

[Sending]

Direct Fax (sending fax directly from PC) can also be used. Sent fax documents can be saved as a PDF and sent as e-mail attachments.

[Reject]

Allows you to block incoming faxes from preset and anonymous numbers.

Supports secure and waste-free output

Print jobs are stored in the HDD of the multifunction device and output only after authentication. This prevents uncollected print output and print error. You can also set the number of copies or change the print settings from single to double sided during output, thus reducing error, waste, and TCO (Total Cost of Ownership).

* Requires use of authenticate mode.

Authentication using IC card


The authentication function can be used to restrict unauthorized users from accessing the multifunction device. You can also check each user's usage from the job log. Authentication using an IC card is also possible by adding an IC card reader to the multifunction device.

Efficiently utilise multiple multifunction devices

Printable from Any Machine on Demand

After a job has been sent to the device, users can choose the "Server-less On-demand" feature to print it from any machine on the network, simply by logging on to the machine. Even if the selected device is in use, users can choose their job from another machine and print it. No dedicated server is required for this feature. It is also possible to use up to five devices in this way by grouping them – for example, by floor or workgroup.

* Optional.

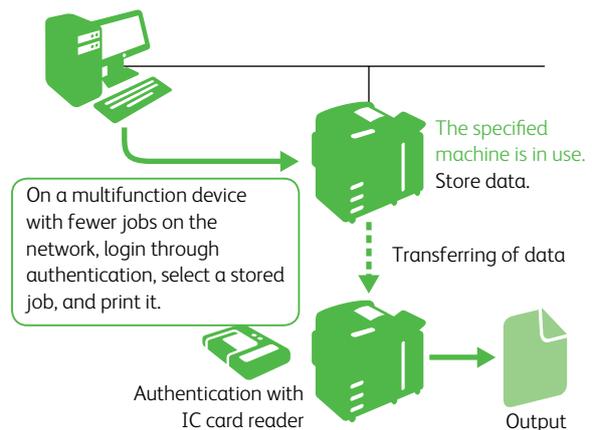

Easy printing wherever you are

Mobile Print Utility for iOS / Android

This free Fuji Xerox application lets you print web pages, pictures, DocuWorks and PDF documents, and import scanned documents to mobile devices. You can configure it to print N-up and duplex. Server-less On-demand printing is also available by assigning authentication information. Additionally, the application is supported by standard printing frameworks on Android™ OS 4.4 or later.

Google Cloud Print

By registering the multifunction device with Google Cloud Print, you can send documents via the cloud from Android™ devices, Chromebook™ and PC's.



* Google Cloud Print is a web printing service provided by Google.

Wi-Fi Direct®

Users can connect the DocuCentre-V series devices anywhere, without the need for network cabling.

* Optional.

AirPrint

Apple® AirPrint™ allows printing email, photos and important office documents directly from Apple iPhone®, iPad® or Mac devices with no drivers to install.



Mopria™ Print

Print even more easily from Android. The Mopria Print Service is an application which lets you print directly from devices running Android 4.4 (KitKat) or later. Documents such as photographs, web pages and PDF files can be printed easily via a wireless LAN to Mopria-certified output devices.



* Mopria Print Service can be downloaded for free from Google Play™. (Android™ 4.4 or later)

Environmentally responsible

A Quiet Environment for Greater Efficiency

To continue to address the levels of noise in the office environment, we have introduced advanced technologies to reduce operation sounds.

* For DocuCentre-V 2060

*1: A-weighted sound power level (LwAd), A-weighted emission sound pressure level (LpAm) is 16dB. Measurement is ISO7779.


*2: A-weighted sound power level (LwAd), emission sound pressure level (LpAm) is 49dB. Measurement is ISO7779.

Environmentally safe new materials

Facing the challenges of modern society such as global warming, petroleum resource depletion and food shortages, Fuji Xerox is engaged in the research and development of environment friendly cellulosic bio-based plastics. The newly developed “woody non-edible biomass plastics” has more strength and flame resistance compared with the conventional petroleum-based plastics and contributes to the reduction of CO₂ emissions.

Smart Energy Management Technology

The new DocuCentre-V series uses Smart Energy Management to power only the functions required by the user. This reduces power consumption and CO₂ emissions. What's more, you will enjoy a much quieter office environment.

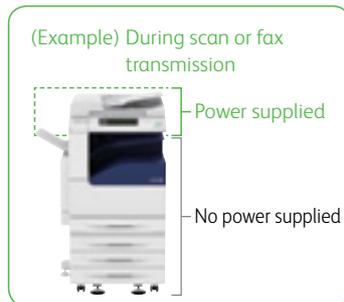

Three second start up time – no need to wait!


When the DocuCentre-V series recovers from sleep mode, it takes only three seconds to start working. Even if the device is routinely set to sleep mode to reduce power use, users don't experience any delays in set-up and operation.

Energy-saving design consuming less than 0.8 W* power during sleep mode

The newly adopted low-power controller and fax board significantly improves power consumption during sleep mode increasing energy efficiency.

* For DC model

Sleep mode power consumption comparison (unit: W)

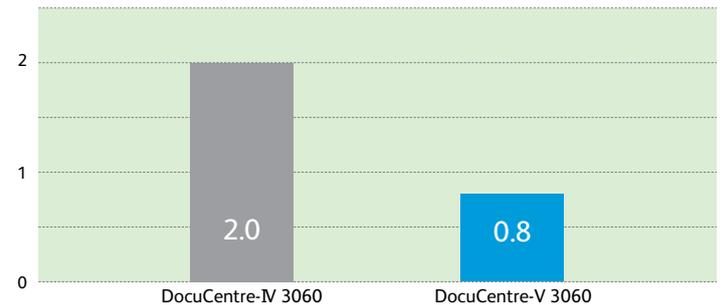

Typical device energy use

Complies with International ENERGY STAR® Program. Greatly contributes to reduction of power consumption.

* Value measured by the test defined in International ENERGY STAR® Program.

Model	Typical Energy Use (kWh)
DocuCentre-V 3065 CPS model	1.7 kWh
DocuCentre-V 3060 CPS model	1.4 kWh
DocuCentre-V 2060 CPS model	1.2 kWh


Cloud service connecting directly to the multifunction device

Direct access from the multifunction device to Fuji Xerox's cloud service “Working Folder.” You can transfer scanned documents and receive fax documents, and also output saved documents. In addition to editing documents in the cloud via DocuWorks Desk, you can also view and edit them from your mobile device.

* Agreement to use the Working Folder service is necessary in order to use this function.


Quickly check received faxes on the go

Automatically upload received faxes to “Working Folder”.

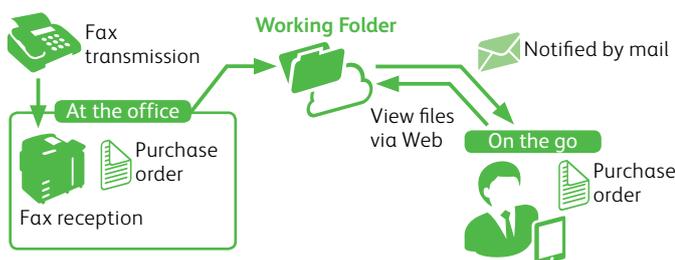

Efficiently perform business activities on the road through mobile intergration

Documents in the Working Folder can be accessed even from a smartphone or tablet.

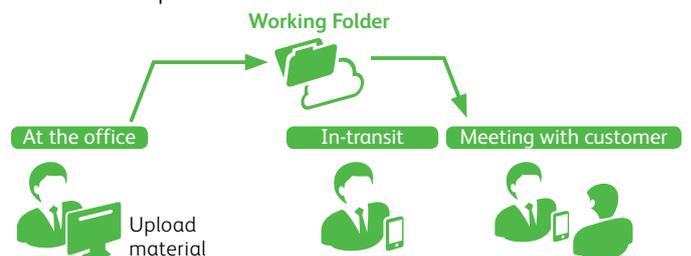

Specifications of DocuCentre-V 3065 / 3060 / 2060

Basic Specifications/Copy Function

Item	DocuCentre-V 3065	DocuCentre-V 3060	DocuCentre-V 2060	
Type	Desktop / Console			
Memory capacity	4 GB (Max: 4 GB)			
Hard disk capacity*1	160 GB or larger (Usable space: 128 GB)			
Scan Resolution	600 x 600 dpi			
Print Resolution	1200 x 1200 dpi			
Warm-up Time	32 seconds or less, 22 seconds or less if the main power is on (At room temperature 24°C)			
Original Size	Maximum of 297 x 432 mm (A3, 11 x 17") for both Sheet and Book			
Paper Size	Max	A3, 11 x 17"		
	Min	A5 [Postcard (100 x 148 mm) and Envelope Monarch (191 x 98 mm) when using Bypass Tray]		
	Image loss width	Lead Edge 4.0 mm, Trail Edge 2.0 mm, Right & Left Edges 2.0 mm		
Paper Weight*2	Paper Tray	60 to 256 gsm		
	Bypass Tray	60 to 216 gsm		
First Copy Output Time	4.5 sec. (A4 LEF)			
Continuous Copy Speed*3	A4 LEF / B5 LEF	35 ppm	30 ppm	25 ppm
	A4	26 ppm	23 ppm	19 ppm
	B5	13 ppm	13 ppm	11 ppm
	B4	22 ppm	20 ppm	16 ppm
Paper Tray Capacity*4	Standard	500 sheets x 1-tray + Bypass Tray 96 sheets		
	Optional	1 Tray Module with Cabinet: 500 sheets x 1-tray 3 Tray Module: 500 sheets x 3-tray		
	Max	2096 sheets [Standard + 3 Tray Module]		
Output Tray Capacity*5	Upper Center: 250 sheets (A4 LEF), Lower Center: 250 sheets (A4 LEF)			
Power Supply	AC220-240 V +/- 10 %, 8 A, 50/60 Hz common			
Maximum Power Consumption	1.92 kW or less (AC240 V +/- 10 %)	1.92 kW or less (AC240 V +/- 10 %)	1.92 kW or less (AC240 V +/- 10 %)	
	Sleep Mode: CP: 1.0 W or less (AC230 V +/- 10 %)	Sleep Mode: CP: 1.0 W or less (AC230 V +/- 10 %)	Sleep Mode: CP: 1.0 W or less (AC230 V +/- 10 %)	
	DC: 0.8 W or less (AC230 V +/- 10 %)	DC: 0.8 W or less (AC230 V +/- 10 %)	Ready Mode: 81 W or less	
	Ready Mode: 81 W or less	Ready Mode: 81 W or less		
Dimensions	W 590 x D 659 x H 768 mm			
	W 616 x D 659 x H 1119 mm (when optional 1 Tray Module with cabinet is installed.)			
	W 616 x D 659 x H 1119 mm (when optional 3 Tray Module is installed.)			
Weight*6	52 kg			
	76 kg (when optional 1 Tray Module with cabinet is installed.)			
	79 kg (when optional 3 Tray Module is installed.)			

*1: The Storage Hard disk or other storage media capacity is not totally available for customers. *2: It is recommended to use Fuji Xerox recommended paper. Correct print output may not be possible depending on the requirement. *3: The speed may be reduced due to the image quality adjustment. *4: 80 gsm paper. *5: 64 gsm paper. *6: Excluding Toner Cartridge.

Print Function (Optional)

Item	Description	
Type	Built-in type	
Continuous Print Speed*1	Same as the Basic Specifications / Copy Function	
Printing Resolution	600 x 600 dpi, 1200 x 1200 dpi	
Page Description Language	Standard	PCL5 / PCL6
	Optional	Adobe® PostScript® 3™
Supported Operating System	Standard (PCL Driver)	Windows® 10 (32bit), Windows® 10 (64bit), Windows® 8.1 (32bit) Windows® 8.1 (64bit), Windows® 8 (32bit), Windows® 8 (64bit) Windows® 7 (32bit), Windows® 7 (64bit), Windows Vista® (32bit) Windows Vista® (64bit), Windows Server® 2012 R2 (64bit) Windows Server® 2012 (64bit), Windows Server® 2008 R2 (64bit) Windows Server® 2008 (32bit), Windows Server® 2008 (64bit) Windows Server® 2003 (32bit), Windows Server® 2003 (64bit)
	Standard (Mac OS X Driver)	OS X 10.10/10.9/10.8, Mac OS X 10.7/10.6/10.5
Optional (Adobe® PostScript® 3™ Driver)	Standard	Windows® 10 (32bit), Windows® 10 (64bit), Windows® 8.1 (32bit) Windows® 8.1 (64bit), Windows® 8 (32bit), Windows® 8 (64bit) Windows® 7 (32bit), Windows® 7 (64bit), Windows Vista® (32bit) Windows Vista® (64bit), Windows Server® 2012 R2 (64bit) Windows Server® 2012 (64bit), Windows Server® 2008 R2 (64bit) Windows Server® 2008 (32bit), Windows Server® 2008 (64bit) Windows Server® 2003 (32bit), Windows Server® 2003 (64bit) OS X 10.10/10.9/10.8, Mac OS X 10.7/10.6/10.5
	Optional	OS X 10.10/10.9/10.8, Mac OS X 10.7/10.6/10.5
Interface	Standard	Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T, USB2.0

*1: The speed may be reduced due to the image quality adjustment. The printing speed may be reduced depending on the document.

Side Tray

Item	Description
Paper Capacity*1	100 sheets
Dimensions	W 353 x D 429 x H 198 mm

*1: 64 gsm paper.

Scan Function

Item	Description	
Type	Colour Scanner	
Scan Resolution	600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi	
Scan Speed*1	Duplex Automatic Document Feeder B/W: 55 ppm, Colour: 55 ppm [Fuji Xerox Standard Paper (A4 LEF), 200dpi, to Folder.]	
Interface	Standard	Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T

*1: The scanning speed varies depending on the documents.

Fax Function (Optional)

Item	Description
Original Size	Max: A3, 11 x 17", Long document (Longest 600 mm)
Recording Paper Size	Max: A3, 11 x 17" Min: A5
Transmission Time	2 seconds and more but fewer than 3 seconds*1
Transmission Mode	ITU-T G3
Applicable Lines	Telephone subscriber line, PBX, Fax communication (PSTN), Maximum 3 ports*2 (G3-3 ports)

*1: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 x 3.85 lines / mm) and in high-speed mode (28.8 kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition. *2: No. of FAX lines is up to 3 ports. Port refers to number of channels for FAX.

Duplex Automatic Document Feeder

Item	DocuCentre-V 3065	DocuCentre-V 3060	DocuCentre-V 2060
Original Size	Max: A3, 11 x 17" Min: A5 *1		
Paper Weight	38 to 128 gsm (In Duplex: 50 to 128 gsm)		
Capacity*2	110 sheets		
Feeding Speed (A4 LEF Simplex)	B/W: 35 ppm	B/W: 30 ppm	B/W: 25 ppm

*1: The minimum custom size is 125 x 85 mm. *2: 64 gsm paper.

Finisher-A1 (Optional)

Item	Description	
Type	Sort (Offset available) / Stack (Offset available)	
Paper Size	Max: A3, 11 x 17" Min: Postcard (100 x 148 mm)	
Paper Weight	60 to 220 gsm	
Paper Capacity*1	Finishing Tray	[Without Stapling] A4: 500 sheets, B4: 250 sheets, A3 or larger: 200 sheets, Mixed Size Stacking*2 : 250 sheets [With Stapling] 30 sets
	Capacity	A4: 50 sheets (90 gsm or less) B4 or larger: 30 sheets (90 gsm or less)
Staple	Paper Size	Max: A3, 11 x 17" Min: B5 LEF
	Position	Single stapling
Dimensions	W 559 x D 448 x H 246 mm	
Weight	12 kg	

*1: 64 gsm paper. *2: When larger size sheets are stacked on top of smaller size sheets.

Finisher-B1 (Optional)

Item	Description	
Type	Sort (Offset available) / Stack (Offset available)	
Paper Size*1	Max: A3, 11 x 17" Min: B5 LEF	
Paper Weight	60 to 220 gsm	
Paper Capacity*2	[Without Stapling] A4: 2000 sheets, B4 or larger: 1000 sheets, Mixed Size Stacking*3 : 300 sheets [With Stapling] A4: 100 sets or 1000 sheets*4 , B4 or larger: 75 sets or 750 sheets [With Booklet Finishing*5] 50 sets or 600 sheets [With Scoring*5] 500 sheets	
	Capacity	50 sheets (90 gsm or less)
Staple	Paper Size	Max: A3, 11 x 17" Min: B5 LEF
	Position	Single stapling or Dual stapling
Punch*6	Number of Holes	2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)
	Paper Size	A3, 11 x 17", B4, A4*7, A4 LEF, Letter*7, Letter LEF, B5 LEF
	Paper Weight	60 to 200 gsm
Booklet Finishing*8	Capacity	Saddle Staple: 15 sheets, Scoring: 5 sheets
	Paper Size	Max: A3, 11 x 17" Min: A4, Letter
Paper Weight	Saddle Staple: 64 to 80 gsm, Scoring: 64 to 105 gsm	
Dimensions	W 657 x D 552 x H 1011 mm, With Booklet Finisher: W 657 x D 597 x H 1081 mm	
Weight	28 kg, With Booklet Finisher: 37 kg	

Note: Finisher-B1 is available only when optional 1Tray Module with Cabinet or 3 Tray Module is attached to Main Unit. *1: Paper size is smaller than B5, and larger than A3, 11 x 17" can be output from the Center Tray. *2: 64 gsm paper. *3: When larger size sheets are stacked on top of smaller size sheets. *4: 75 sets or 750 sheets with dual stapling. *5: The Booklet Finishing function requires the optional Finisher-B1 Booklet unit. After a job with the Booklet Finishing function specified has been output, the next job may not be delivered until the sheets are removed from the output tray. Also, if larger size sheets are stacked on top of smaller size sheets after a job with the Booklet Finishing function specified has been run, the next job may not be delivered until the sheets are removed from the output tray. *6: The Punch function requires the optional Finisher-B1 Punch unit for 2-hole / 4-hole punch or Finisher-B1 Punch unit for 2-hole / 3-hole punch (US Specifications). *7: 3-hole punch is not applicable.

Customer Expectation Document (CED)

For detailed product specifications, optimum performance parameters and service clearances refer to the Customer Expectation Document.

About Fuji Xerox Australia

With a noble purpose of 'liberating people to work smarter', Fuji Xerox Australia helps its clients to deliver the right information to the right people in the right format. This is achieved through the implementation of efficient business processes and effective communication. Fuji Xerox Australia is well recognised for its commitment to sustainability having received several awards including a United Nations 500 Roll of Honour listing and a Banksia Award for leadership in sustainability.

For more information, visit www.fujixerox.com.au or www.fxasustainability.com.au

Descriptions in this material, product specifications and / or appearances are subject to change without prior notice due to improvements. Please note that the product colour appears differently from the actual colour as a result of properties of papers or printing ink. Other company names or product names are registered trademarks or trademarks of each company. Spares for the standard configuration of installed machines is supported for up to 7 years from the date of the end of machine production.

All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law : Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. Unused postage stamps, post cards, etc. Certificate stamps stipulated by law. Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.



For Your Safety

Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.

For more information or detailed product specification, please call or visit us at

Fuji Xerox Australia Pty. Ltd.

101 Waterloo Road, Macquarie Park, NSW Australia. 2113

Tel. 13 14 12

<http://www.fujixerox.com.au/>

